


# Technical Data Sheet

Product code: **AMC-L800**  
Description: **Unidirectional Multiaxial Cloth**  
Fibre type: E-Glass 300 tex  
E-Glass 2900 tex  
E-Glass 2400 tex

CONSTRUCTION	LAYER WEIGHT (g/m <sup>2</sup> )	TOLERANCE (± %)	MATERIAL
0°	799	5	E-Glass 2900 tex
90°	54	5	E-Glass 300 tex
Mat	50		E-Glass 2400 tex
Knitting Yarn	12	5	Polyester 110 d'tex
Total Weight	915 g/m <sup>2</sup>	5	
Stitch gauge	7 per inch (2.75/cm)	Stitch style	Tricot Stitch
Knitting yarn	Polyester 110d'tex	Stitch length	3.6 cpcm

Standard Roll Width: 1270 mm (±5%)  
Standard Roll Weight: 35 kg  
Standard Roll Area: 38.1 m<sup>2</sup>  
Standard Roll Length: 30 m  
Packaging: Wrapped in PVC and placed within a cardboard carton. Positioned securely on to a pallet, strapped and covered.  
Traceability: All fabrics are identified with a unique style number and all rolls produced have unique batch numbers.  
Labelling: All rolls of material have a label placed within the core, on the roll and on the carton for clear identification.  
Type Approvals: Lloyds Register

Importers and Distributors:

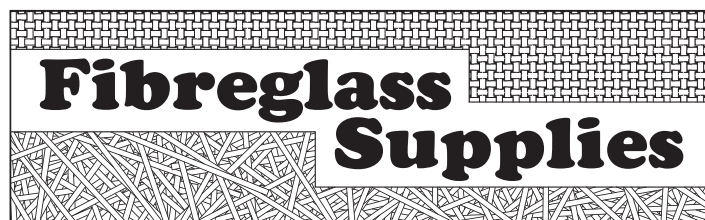

3 Civil Place, Albany  
Ph: 09 476 1377

[www.fibreglass-supplies.com](http://www.fibreglass-supplies.com)